

Incorporates HDBase-T technology

LM-EHP100 HDMI Extender

Operating Instruction



Notice

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute the warranty of any kind, express or implied.

Features

- Extends HDMI with multi-channel digital audio, IR and RS232 up to 330 feet (100 meters).
- Supports resolutions up to Ultra HD 4K x 2K (3840 x 2160 @ 30 Hz) and 1080P Full HD.
- 5Play™ convergence: uncompressed high definition Video and Audio, LAN serving, Power over Ethernet and RS-232/IR controls
- Supports LPCM 7.1 audio, Dolby® TrueHD, Dolby Digital® Plus, and DTS-HD® Master Audio™ pass-through
- Supports 48bit Deep Color
- Supports Bi-directional IR control.
- CEC pass-through
- Supports HDCP

Package Contents


- 1xHDBaseT Transmitter
- 1xHDBaseT Receiver
- 2xIR-TX cable
- 2xIR-RX cable
- 1x48V/1.25A DC Adaptor
- 1xUser Manual
- 1x Pair wall/rack mounts

Specifications

Operating Temperature Range	-5 to +35°C(+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Output Video Bandwidth	300MHz/10.2Gbps
Ethernet Speed	100 Mbps
Transmitter ports	1xHDMI (female)-Video Input 1xDB9 (female) , 1xLink Connector RJ-45 1xEthernet Port RJ-45 1xDC jack(DC48V)
Receiver Ports	1xHDMI (female)-Video Input 1xDB9 (male) , 1xLink Connector RJ-45 1xEthernet Port RJ-45 1xDC jack(DC48V)
IR wavelength & frequency	Wavelength: 940nm IR Frequency: 38KHz
Resolution outputs	up to 4K x 2K (3840 x 2160 @ 24Hz)
Dimensions	Transmitter:4.97" x3.74" x1"(126.1x95x25.5mm) Receiver:4.97" x3.74" x1"(126.1x95x25.5mm)
Power consumption	Transmitter: 5 W(MAX);Receiver: 3W(MAX)
Transmission Distance	330ft(100m)over Cat-5e(or better) cable
Net Weight	Transmitter: 0.748lbs(340g) Receiver:0.737lbs(335g)

Panel Description

Transmitter Panel

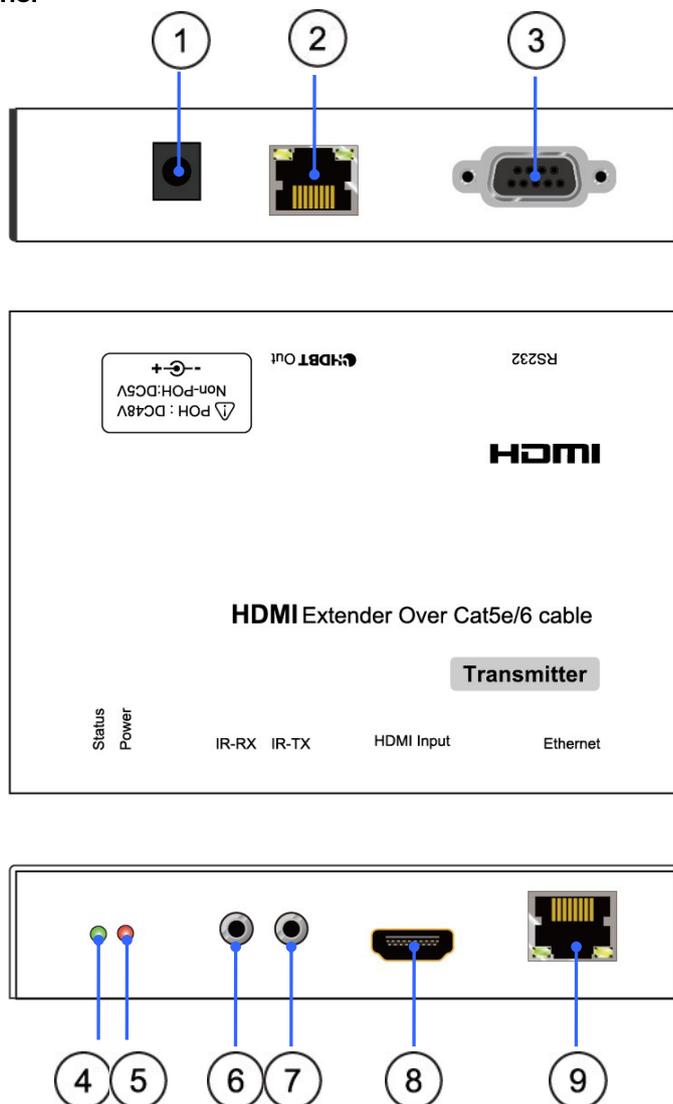

- 1) DC input port- The 48V DC is the power input for the transmitter
- 2) HDBaseT port-This is for the Cat5e cable connection between the two units.
 - A.yellow LED-The LINK LED indicates that an HDBaseT link connection has been established between the two boards over the Cat5e cable.
 - B.green LED-
 - a. When the LED is on, it indicates that video content with HDCP protection is being transferred.
 - b. When the LED is blinking, it indicates that video content without HDCP protection is being transferred.
 - c. When the LED is off, it indicates that no video is being transferred.
- 3) RS232 - This connector has a dual purpose
 - A:In its default mode, it may be used for serial RS232 data transfer over the HDBaseT link
 - B:When connected to a user' s PC it serves as a debug interface(See Update instruction)
- 4) LED Indicators: status - when blinking indicates the device is active.
- 5) LED Indicators: Power - The PWR LED indicates that power is available to the unit.
- 6) IR-RX port - This jack can be used for connecting IR-RX cable.
- 7) IR-TX port - This jack can be used for connecting IR-TX cable.
- 8) HDMI Input port



9) Ethernet port – There is one standard Ethernet port.

Connect power adapter with the transmitter, the transmitter is a PSD, the receiver is a PD.

⚠ Note: To avoid the unit being damaged, DO NOT connect power supply for both of transmitter and receiver.

Update instruction:

① Open the case of transmitter, find these two jumper caps.

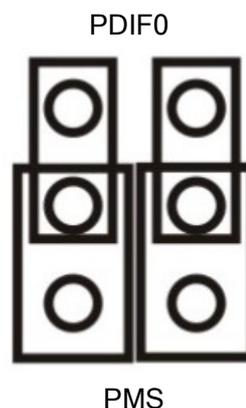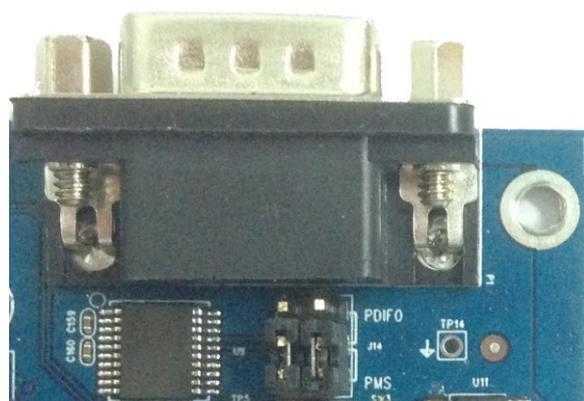

According to the silk prints nearby (“PMS” for firmware update, “PDIF0”for RS232 transmission), change the jumper caps’ positions to set RS232 port’s function.

②The user should receive a Firmware burn package, containing all software needed for burning and updating the Firmware on the EEPROM.

③Connect RS232 port use RS232 cable from RS232 port of unit to PC.

④Power the unit.




⑤Extract the zipped file from the burn package to a directory (e.g. C:\dir_name).

⑥Browse to the directory (e.g. C:\dir_name) and double click the batch file Update Source. bat(for Transmitter) or Update Sink. Bat (for receiver).

A short description of the link created between the PC and the board appears on the screen, followed by the burn progress percentage report.

⑦ A second stage of verifying the content of the EEPROM follows, also with a progress percentage report


Receiver Panel

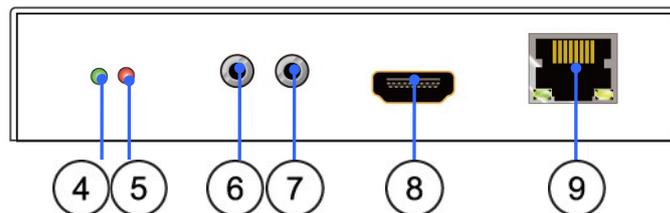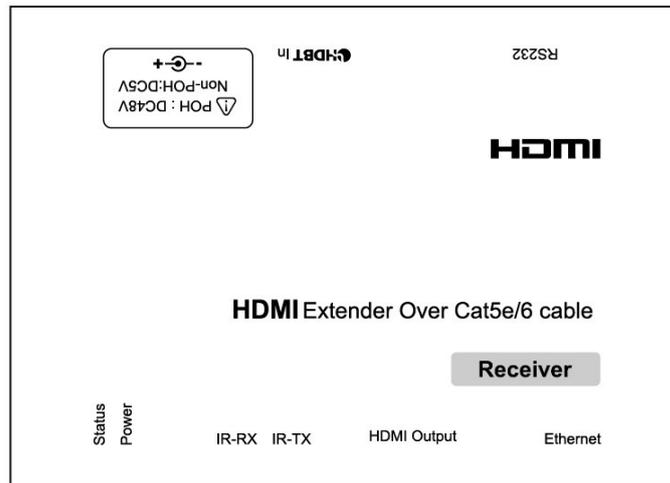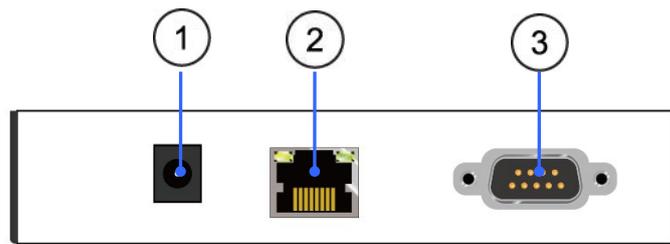

- 1) DC input port- NO need power.
 - 2) HDBaseT port-This is the Cat5e cable connection between the two units.
 - A:yellow LED-The LINK LED indicates that an HDBaseT link connection has been established between the two boards over the Cat5e cable.
 - B:green LED-
 - a.When the LED is on, it indicates that video content with HDCP protection is being transferred.
 - b. When the LED is blinking, it indicates that video content without HDCP protection is being transferred.
 - c.When the LED is off, it indicates that no video is being transferred.
 - 3) RS232 - This connector has a dual purpose
 - A:In its default mode, it may be used for serial RS232 data transfer over the HDBaseT link
 - B:When connected to a user' s PC it serves as a debug interface(See Update instruction
 - 4) LED Indicators:status - when blinking indicates the device is active.
 - 5) LED Indicators:Power - The PWR LED indicates that power is available to the unit.
 - 6) IR-RX port - This jack can be used for connecting IR-RX cable.
 - 7) IR-TX port - This jack can be used for connecting IR-TX cable.
 - 8) HDMI Output port
 - 9) Ethernet port - There is one standard Ethernet port.
-  *the receiver is a PD, no need power.*
To avoid the unit being damaged, DO NOT connect power supply for both of transmitter and receiver.

Connection Diagram

Application

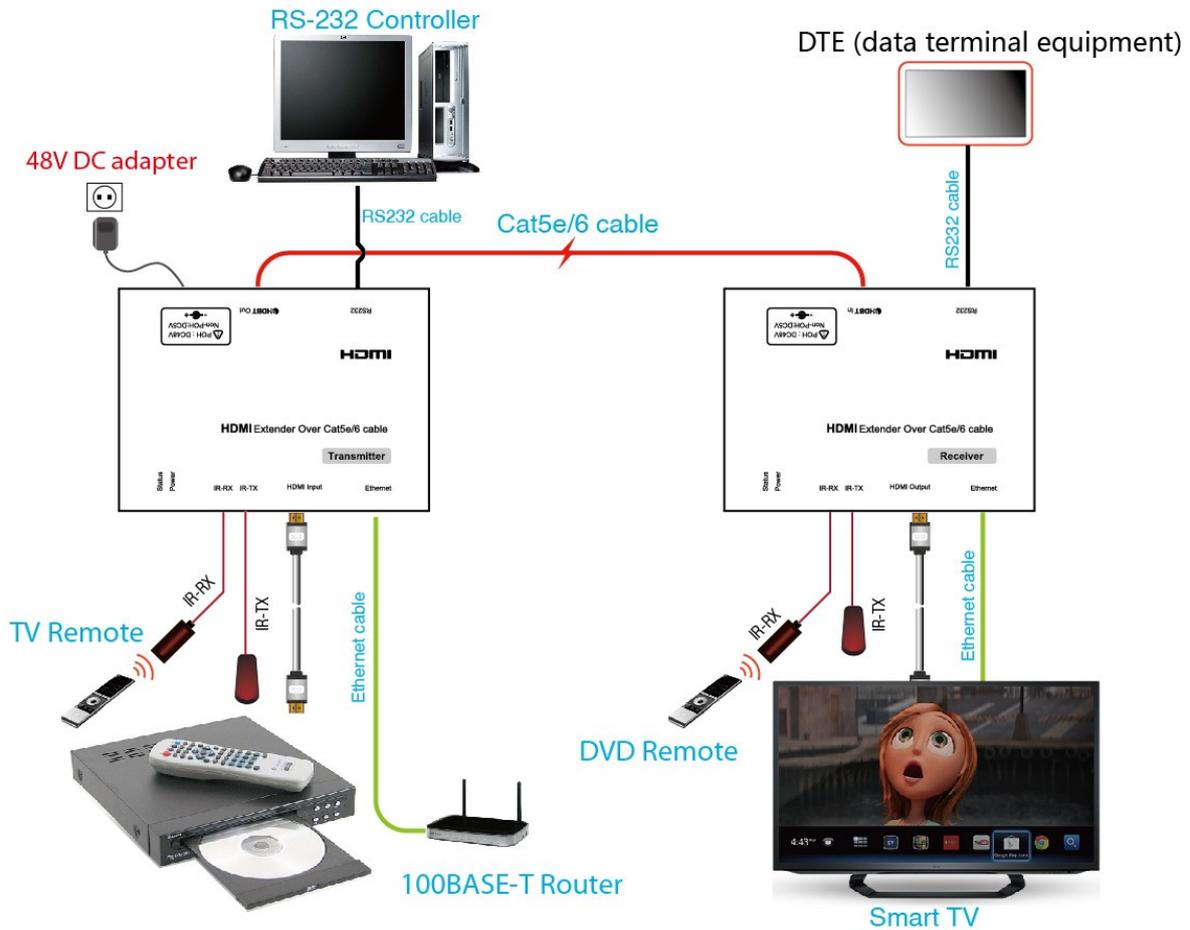

CONNECTING AND OPERATING

- 1) Connect the HDMI signal sources (Such as DVD, STB etc) to HDMI Transmitter.
- 2) Connect cat5e/6 cables to both HDBaseT port of the transmitter and HDBaseT port of the Receiver.
- 3) Connect the HDMI output (Such as HD-LCD, HD-DLP) into the Receiver.
- 4) Connect the IR-TX cable into transmitter IR-TX port on the back panel and affix the emitter onto the source IR windows ,Connect the IR-TX cable into receiver IR-TX port on the back panel and affix the emitter onto the sink IR windows.
- 5) Connect the IR RX receiving cables into IR-RX port of receiver, and affix the IR RX near or on the video Display frame or stand within direct line of sight with the hand held remote,connect the IR-RX cable into the transmitter to control the sink.
- 6) Connect the 48V DC power supply into transmitter power port . (DO NOT connect 48V DC power supply for both of transmitter and receiver)

Attention: Insert/Extract cables gently.

Safety information

safeguards



To reduce the risk of electric shock, do not expose this product to rain or moisture

PRODUCT SERVICE

- 1) **Damage requiring service:** The unit should be serviced by qualified service personnel if:
 - (a) The DC power supply cord or AC adaptor has been damaged;
 - (b) Objects or liquids have gotten into the unit;
 - (c) The unit has been exposed to rain;
 - (d) The unit does not operate normally or exhibits a marked change in performance;
 - (e) The unit has been dropped or the cabinet damaged.
- 2) **Servicing Personnel:** Do not attempt to service the unit beyond that described in these operating instructions. Refer all other servicing to authorized servicing personnel.
- 3) **Replacement parts:** When parts need replacing ensure the servicer uses parts specified by the manufacturer or parts that have the same characteristics as the original parts. Unauthorized substitutes may result in fire, electric shock, or other hazards.
- 4) **Safety check:** After repairs or service, ask the servicer to perform safety checks to confirm that the unit is in proper working condition.

WARRANTY

If your product does not work properly because of a defect in materials or workmanship, our Company (referred to as "the warrantor") will , for the length of the period indicated as below, **(Parts(1)Year ,Labor(90) Days)** which starts with the date of original purchase ("Limited Warranty period"), at its option either(a) repair your product with new or refurbished parts, or (b) replace it with a new of a refurbished product. The decision to repair or replace will be made by the warrantor.

During the "Labor" Limited Warranty period there will be no charge for labor.

During the "Parts" warranty period, there will be no charge for parts. You must mail-in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers product purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.

Mail-In Service

When shipping the unit carefully pack and send it prepaid, adequately insured and preferably in the original carton. Include a letter detailing the complaint and provide a day time phone and/or email address where you can be reached.

LIMITED WARRANTY LIMITS AND EXCLUSIONS

- 1) This Limited Warranty ONLY COVERS failures due to defects in materials or workmanship, and DOES NOT COVER normal wear and tear or cosmetic damage. The Limited Warranty ALSO DOES NOT COVER damages which occurred in shipment, or failures which are caused by products not supplied by warrantor, or failures which result from accidents, misuse, abuse, neglect, mishandling, misapplication, alteration, faulty installation, set-up adjustments, misadjustment of consumer controls, improper maintenance, power line surge, lightning damage, modification, or service by anyone other than a Factory Service center or other Authorized Servicer, or damage that is attributable to acts of God.
- 2) THERE ARE NO EXPRESS WARRANTIES EXCEPT AS LISTED UNDER "LIMITED WARRANTY COVERAGE". THE WARRANTOR IS NOT LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THIS PRODUCT, OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. (As examples, this excludes damages for lost time, cost of having someone remove or re-install an installed unit if applicable, travel to and from the service, loss of or damage to media or images, data or other recorded content. The items listed are not exclusive, but are for illustration only.)
- 3) PARTS AND SERVICE, WHICH ARE NOT COVERED BY THIS LIMITED WARRANTY, ARE YOUR RESPONSIBILITY.